

HUSSMANN®

HGL-2BS

Vertical Glass Door Merchandiser for Frozen Food and Ice Cream




HGL-BS Optional
Lighted Sign



Self-Contained and Remote HGL Vertical Glass Door Merchandisers

HUSSMANN®

HGL-1BS, HGL-2BS, HGL-3BS Bottom Mount Low Temperature for Frozen Food and Ice Cream

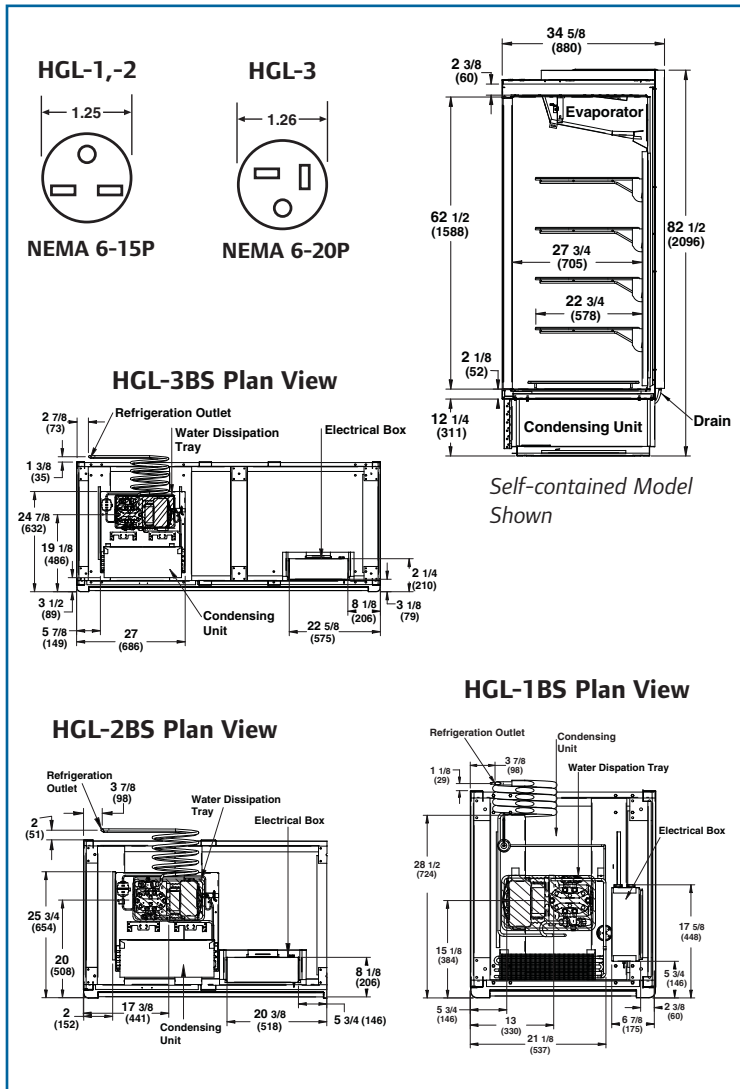

Standard Features

- Contemporary styling places maximum attention on merchandising. All HGL merchandisers have the same access panel design for commonality between merchandisers.
- Product visibility is improved with 60" long vertical T-8 lighting and electronic ballasts. Merchandise is evenly illuminated throughout display area. More lights per merchandiser with two lights in single-door, three-lights in two-door, and four lights in three-door models.
- White powder coated exterior and interior finish.
- CFC-Free foamed-in-place urethane insulation.
- Doors can be locked open for stocking.
- Each door section includes four adjustable cantilever-type shelves and a bottom rack. All shelves and racks have a white epoxy coated finish. Shelves may be slanted for special displays and are interchangeable in all models.
- Full use of the shelf upright posts is available for positioning the shelves. Shelf bracket profiles have been slimmed down to better facilitate product merchandising under and across the shelves.
- Low temperature HGL models are equipped with a single 230-volt power cord attached (see diagram).
- Balanced refrigeration system provides maximum efficiency and energy savings. Includes thermostat-controlled automatic defrost.
- Easy-to-read digital solar powered thermometer. Electronic temperature control ensures consistent product temperature.

Matching Medium Temperature Models

For a matching side-by-side display of dairy, deli, beverages and wine, be sure to see the companion HGM-BS series of medium temperature 1-, 2-, and 3-door models.

Warranty

For detailed warranty information, visit www.hussmann.com.

Optional Accessories

- Variety of Exterior Colors
- Three Tier Step Rack
- Price Tag Moulding
- Baskets
- Door Guard
- Leveler Kit
- LED Lights
- Peg Bar and Hooks
- End Windows
- Lighted Sign
- Shelf Product Stops
- Additional Display Shelves
- Caster Kit

Model	Refrigeration load (BTU/h)	A/C load (BTU/h)	Energy Consumpt. (kWh/day)
HGL-1BS	3600	7080	23.37
HGL-1B		—	—
HGL-2BS	4650	9150	42.05
HGL-2B		—	—
HGL-3BS	4830	9500	52.49
HGL-3B		—	—



Model	Exterior Dimensions			Nominal H.P.	Refrig.	Electrical					Approx. Ship Wt. (LBS)
	L	D*	H			Hz/Ph	Volts	Run Amps	Fuse Amps	NEMA Plug	
HGL-1BS	28 7/8"	34 5/8"	82 1/2"	3/4	R-404a	60/1	208/230	8.4	15	6-15P	667
HGL-1B	28 7/8"	34 5/8"	82 1/2"	—	R-404a	60/1	208/230	7.9	15	hardwired	562
HGL-2BS	52"	34 5/8"	82 1/2"	1	R-404a	60/1	208/230	9.5	15	6-15P	936
HGL-2B	52"	34 5/8"	82 1/2"	—	R-404a	60/1	208/230	8.9	15	hardwired	821
HGL-3BS	75 3/8"	34 5/8"	82 1/2"	1 1/2	R-404a	60/1	208/230	12.5	20	6-20P	1225
HGL-3B	75 3/8"	34 5/8"	82 1/2"	—	R-404a	60/1	208/230	10.2	15	hardwired	1100

*Exclusive of door handles. Optional lighted sign increases overall height to 83 9/16".

NOTE: For optimum performance, these models are designed for use in air-conditioned stores where temperature and humidity are maintained at 75°F and 55% R.H. Locate case away from direct sunlight, rapid air currents and extreme temperature changes. Case is designed for holding pre-chilled product only.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

Web Site: www.hussmann.com