

Self-contained salad top refrigerators

Short form specifications

Exterior top shall be one-piece, 22-gauge stainless steel with front edge turned down to form nosing.

Exterior back and bottom shall be one-piece 24-gauge galvanized metal. Exterior ends shall be 22-gauge stainless steel.

Base interior shall be one-piece thermoformed ABS plastic material, with integral shelf supports. Cabinet shall have (6) epoxy-coated wire shelves installed. Base shall be fully insulated with high-density foamed-in-place polyurethane.

Doors shall have a 22-gauge stainless steel exterior, with a thermoformed ABS plastic interior liner, and shall be fully insulated with foamed-in-place polyurethane. Door handles shall be black, recessed and shall extend the full length of the top of the door.

Refrigeration system shall use HCFC-22 refrigerant. Compressor shall be 1/4 h.p., with condenser coil and hot gas condensate evaporator mounted on rear of cabinet. Evaporator coil and temperature control shall be mounted on the interior rear wall of the cabinet. Refrigerant flow shall be controlled by a capillary tube. Cabinet shall maintain 36°F to 40°F (2°C to 4°C) interior cabinet temperature.

Electrical connections shall be 115 volt, 60 Hertz, single phase. Unit shall have a 7' (2.1 m) long electrical cord and NEMA 5-15P plug. Cord and plug shall be located on rear of cabinet, 12" (30.5 cm) from right end, 6" (15.2 cm) above floor.

Equipment shall be mounted on 6" (15.2 cm) high metal legs with black enamel finish.

THE FOLLOWING APPLIES TO MODEL 4260-8 ONLY:

Rear edge of top shall be turned up to form a 4" (10.2 cm) high backsplash. Top shall have (1) die-stamped raised rim opening. Opening shall have a stainless steel lid. (8) 1/2-size 4" (10.2 cm) deep plastic pans shall be installed. (1) 60" x 12" x 0.5" (68.6 cm x 30.5 cm x 1.3 cm) composition-type cutting board shall be mounted on the top at the front edge.

THE FOLLOWING APPLIES TO MODEL 4260-12 ONLY:

Rear edge of top shall be turned up to form a 4" (10.2 cm) high backsplash. Top shall have (1) die-stamped raised rim opening. Opening shall have a stainless steel lid. (12) 1/2-size 4" (10.2 cm) deep plastic pans shall be installed. (1) 60" x 12" x 0.5" (68.6 cm x 30.5 cm x 1.3 cm) composition-type cutting board shall be mounted on the top at the front edge.

THE FOLLOWING APPLIES TO MODEL 4260-18 ONLY:


Rear edge of top shall be turned down. Top shall have (3) die-stamped raised rim openings. Openings shall have (1) stainless steel telescoping cover. (18) 1/2-size 4" (10.2 cm) deep plastic pans shall be installed. (1) 60" x 8" x 0.5" (68.6 cm x 16.5 cm x 1.3 cm) composition-type cutting board shall be mounted on the top at the front edge.

THE FOLLOWING APPLIES TO MODEL 4260-24 ONLY:


Rear edge of top shall be turned down. Top shall have (4) die-stamped raised rim openings. Openings shall have (2) stainless steel telescoping covers, one for each two openings. (24) 1/2-size 4" (10.2 cm) deep plastic pans shall be installed. (1) 60" x 8" x 0.5" (68.6 cm x 16.5 cm x 1.3 cm) composition-type cutting board shall be mounted on the top at the front edge.

Optional accessories & modifications


- | | |
|---|---|
| <input type="checkbox"/> Stainless steel back | <input type="checkbox"/> Plastic laminate on front |
| <input type="checkbox"/> Additional wire shelves | <input type="checkbox"/> Stainless steel single-tier overself |
| <input type="checkbox"/> 5" (12.7 cm) diameter casters | <input type="checkbox"/> Door lock |
| <input type="checkbox"/> 220 volt, 50 Hertz electrical system | |



Model 4260-8



Model 4260-12




Model 4260-24




The refrigeration system on this equipment uses HCFC-22 refrigerant.




Self-contained salad top refrigerators




PLAN VIEW
MODEL 4260-8




PLAN VIEW
MODEL 4260-12




PLAN VIEW
MODEL 4260-18




PLAN VIEW
MODEL 4260-24




ELEVATION VIEW
MODEL 4260-8




ELEVATION VIEW
MODEL 4260-12




ELEVATION VIEW
MODEL 4260-18



ELEVATION VIEW
MODEL 4260-24

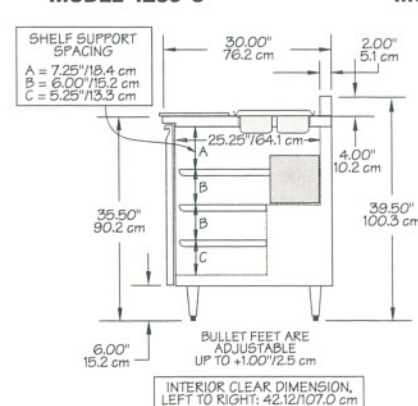


RIGHT END VIEW
MODELS 4260-8 AND 4260-12

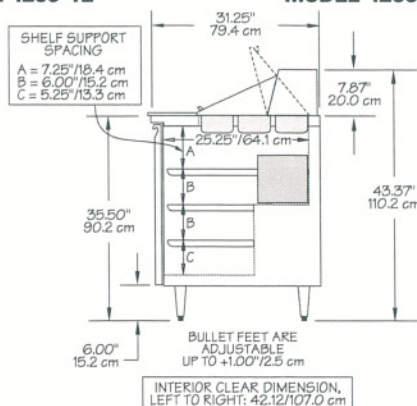


RIGHT END VIEW
MODELS 4260-18 AND 4260-24


INSTALLATION NOTE:
Refrigeration system is designed so that air will flow under the unit, through the compressor area, and out the top rear of the unit. Any restriction to this air flow path will void the warranties.



DOOR CLEARANCE DETAIL
24" WIDE DOORS



DOOR CLEARANCE DETAIL
18" WIDE DOORS



LID HEIGHT DETAIL
MODELS 4260-8 AND 4260-12

MODEL NUMBER	1/4-SIZE PAN CAPACITY	NUMBER OF SHELVES	SHELF AREA	STORAGE CAPACITY	SHIP WEIGHT	HORSE-POWER	VOLTS/ HERTZ/ PHASE	AMPS	NEMA PLUG
4260-8	8	6	10.5 ft ² 0.98 m ²	15.4 ft ³ 0.44 m ³	386 lbs 175 kg	1/4	115/60/1	7.0	5-15P
4260-12	12	6	10.5 ft ² 0.98 m ²	15.4 ft ³ 0.44 m ³	386 lbs 175 kg	1/4	115/60/1	7.0	5-15P
4260-18	18	6	10.5 ft ² 0.98 m ²	15.4 ft ³ 0.44 m ³	386 lbs 175 kg	1/4	115/60/1	7.0	5-15P
4260-24	24	6	10.5 ft ² 0.98 m ²	15.4 ft ³ 0.44 m ³	398 lbs 181 kg	1/4	115/60/1	7.0	5-15P



Post Office Box 470 ♦ Mount Pleasant, Michigan 48804-0470
(517) 773-7981 ♦ (800) 733-8821 ♦ FAX (800) 669-0619

Delfield reserves the right to make changes in design or specifications without prior notice. ©1990, 1994 The Delfield Company. All rights reserved. Printed in U.S.A.